


TS2

TS2 240 / TS2 360

**1STPLAYER
CPU LIQUID COOLER**

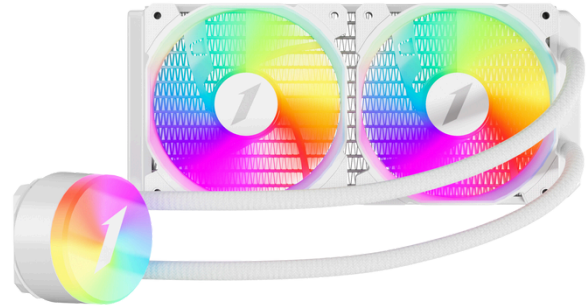

FEATURES:

- Pure copper cold plate for efficient heat absorption
- Support 5v Sync with Motherboard (aRGB) on Pump and Fan
- Temperature-controlled 9-blade fan with noise reduction
- High-density fin heat sink for superior cooling
- High-performance silicone grease for better thermal conductivity
- Support Intel LGA 1851 / 1700 / 2011 / 115x / 1366 and AMD AM5 / AM4 / FM3 / FM2 / FM1 / AM3 / AM2
- 5-year warranty covers long-term product support



**CPU LIQUID COOLER
TS2 240 / 360**

V251219K


REVISION HISTORY

Version Number	Modification Description	Modified By
V250417B	Updated Warranty	Ben
V250428B	Updated Features, Supported cpu	Ben
V251219K	Warranty period extended from 3 years to 5 years	Kane

SPECIFICATIONS



MODEL		TS2 240	TS2 360
SUPPORTED CPU		Intel LGA 1851 / 1700 / 2011 / 115x / 1366 AMD AM5 / AM4 / FM3 / FM2 / FM1 / AM3 / AM2	
WARRANTY		5 years	
	DIMENSIONS(L x W x H)	277 x 119 x 27 mm	397 x 120 x 27 mm
	MATERIALS	Aluminum	
TUBE	LENGTH	350 mm	380 mm
PUMP	DIMENSIONS(L x W x H)	74 x 89.2 x 51.8 mm	
	SPEED	2500 RPM \pm 10%	
	NOISE	30 dB(A)	
	CONNECTOR	3 pin + aRGB	
	RATED VOLTAGE	12V DC	
	RATED CURRENT	\leq 0.30 A	
	POWER CONSUMPTION	\leq 3.6 W	
FAN	QTY	2 PCS	3 PCS
	DIMENSIONS(L x W x H)	120 x 120 x 25 mm	
	SPEED	600 - 1800 RPM \pm 10%	
	AIRFLOW	75.61 CFM	
	AIR PRESSURE	2.2 mmAq	
	NOISE	\leq 36.5 dB(A)	
	CONNECTOR	4 pin (PWM) + aRGB	
	BEARING TYPE	Hydraulic Bearing	
	RATED VOLTAGE	12V DC	
	RATED CURRENT	0.28 A \pm 10%	
	POWER CONSUMPTION	3.36 W \pm 10%	

PICTURES

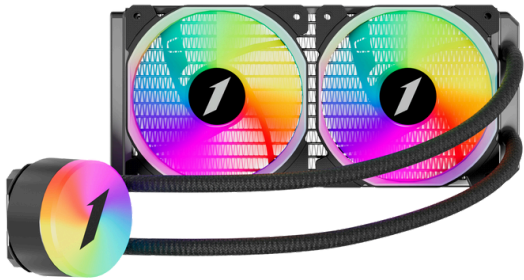

CPU LIQUID COOLER
TS2 240

PICTURES

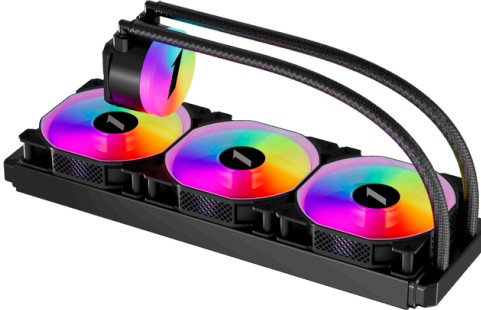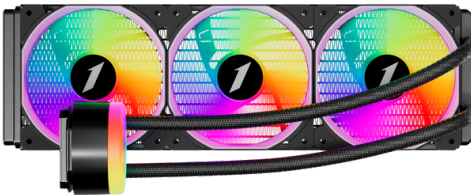

CPU LIQUID COOLER
TS2 360